




EXCELAM-QCOLD Series

Q1400COLD/RS, Q1400COLD/RSER
Q1400COMBI/RSER, Q1600COLD/RS
Q1600COLD/RSER, Q1600COMBI/RSER



Film Adaptor/Dual 3"

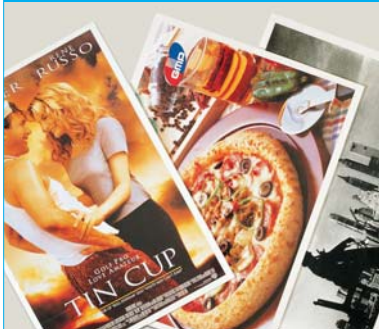

- High speed Laminating (Up to 5m/min)
- Strengthen Main Motor for better drive torque and its durability
- Rewinder connected to the powerful main motor
- Top rewinder for releasing liner
- Easy to use for outer rewinder tension control
- Designed for dual film core and stronger unwinder shaft
- Sub heating system (upper roller)
: 1600COMBI/RSER
- Mounting up to 13mm
- Back Trimmer for limited web removal

EXCELAM-QCOLD Series

www.gmp.com

KOSDAQ Registered Corporation(NO. 018290)

ISO 9001:2000 Certificate



ISO 14001 Certificate



RoHS Certificate



UL-WTDP, CB-TMP Lab. Certificate



GMP GMP CO., LTD.

GMP EXCELAM-QCOLD Series

EXCELAM-Q COLD is the perfect machine for wide range of service in a copy shop environment or as a print finishing. Ideal for laminating posters, ink-jet prints, leaflets and maps with superb results and for truly professional mounting up to 13mm GMP LAMIFOAM (Foamboard). Super Cold Laminating results on wide ranges of Cold films from 25micron & 50micron GMP Crystalex Film (Polyester Base Cold Film) Including 75micron & 100 micron GMP Pronex Cold UV Film (Soft Touch Cold Film). Features include variable speed and pressure adjust handle, for laminating thickness and pressure, mounting thickness setting.



EXCELAM-Q COLD Series

- ① Film Adaptor/Dual 3"
- ② Safety Sensor
Positioned at the leading edge of the rollers, this device prevents operators, loose clothing or foreign objects from becoming entangled in the machine
- ③ Power switch
- ④ Back Trimmer
Rear cut-off blade for easy web separation



Specifications

Model Name	Q1400COLD/RS	Q1600COLD/RS	Q1600COMBI/RSER
MAX. Laminating Speed	5m/min	5m/min	5m/min
Laminating Width	1400mm	1600mm	1600mm
Laminating Films	75mic~500mic	75mic~500mic	25mic~500mic
Thickness of substrate(Paper)	80g/㎡ ~ 350g/㎡	80g/㎡ ~ 350g/㎡	80g/㎡ ~ 350g/㎡
MAX. Thickness Mount	13mm	13mm	13mm
Power Requirements	220~240V, 50/60Hz	220~240V, 50/60Hz	220~240V, 50/60Hz
Power Consumption	100W, 0.4A	100W, 0.4A	2000W, 8.3A
Warm up Time	-	-	5 minutes
Heating System	-	-	Infrared Heater
Operating Temperature	-	-	150 °C Max.
Speed Control	Knob & Volume	Knob & Volume	Key Pad
Temperature Control	-	-	Key Pad
Film Core	77Dual	77Dual	77Dual
Dimensions(WxLxH)	1640 x 750 x 1200mm	1840 x 750 x 1200mm	1840x 750 x 1200mm
Type of Main Motor	DC-Geard Motor	DC-Geard Motor	DC-Geard Motor
Type of Rewinder Motor	Link to Main Motor	Link to Main Motor	Link to Main Motor

GMP reserves the right to change specifications without prior notice.